


VARIOUS POOL FENCE TYPES


(NOT ALL POSSIBLE POOL FENCE DESIGNS ARE SHOWN. PLEASE CHECK WITH YOUR INSPECTOR FOR MORE INFORMATION)

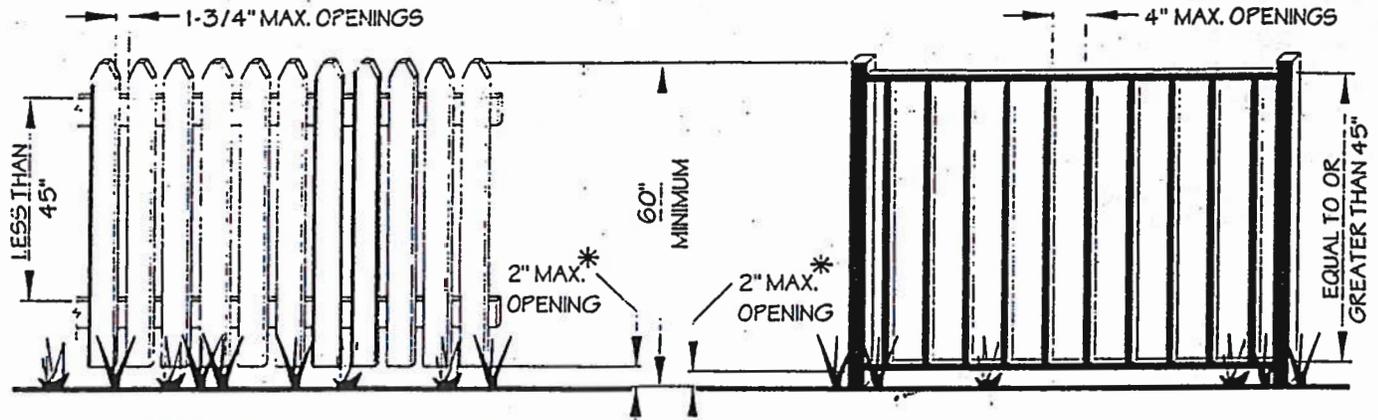

IF HORIZONTAL MEMBERS ARE LESS THAN 45" APART, VERTICAL SPACING SHALL NOT EXCEED 1-3/4" AND HORIZONTAL MEMBERS SHALL BE ON POOL SIDE.


IF HORIZONTAL MEMBERS ARE EQUAL TO OR MORE THAN 45" APART, VERTICAL SPACING SHALL NOT EXCEED 4".

* NOTE: Spacing from grade level to bottom of fence, may be 4 inches if grade below fence has a solid impenetrable surface such as concrete.

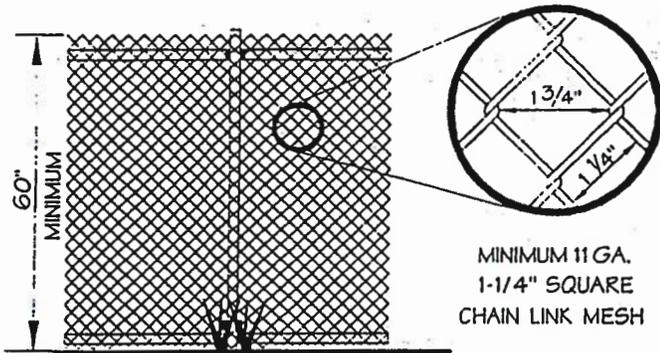

MINIMUM 11 GA. 1-1/4" SQUARE CHAIN LINK MESH

NOTE: If chain link dimensions are larger than shown above, then slats may be woven into the chain link mesh and fastened at the top and bottom.

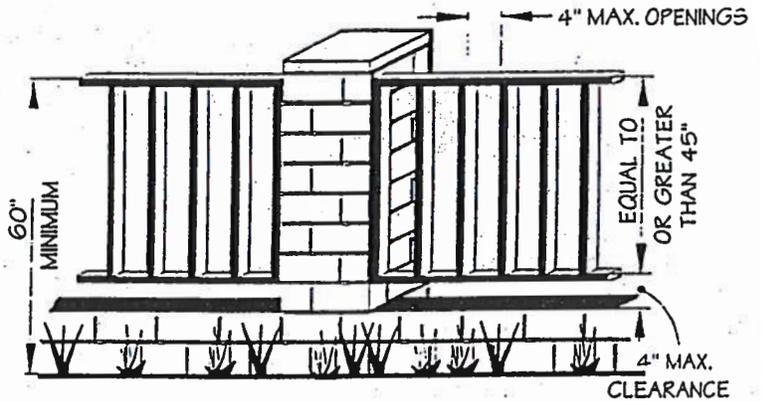

GATE LATCHING REQUIREMENTS


ALL GATES MUST SWING AWAY FROM POOL. BE SELF-CLOSING & SELF-LATCHING

Protective shield or fencing with no openings greater than 1/2".

Release mechanism shall be located on "pool" side.

Release mechanism may be located on either side IF at 54" + above grade.

Release Mechanism shall be located at least 60 inches above grade.

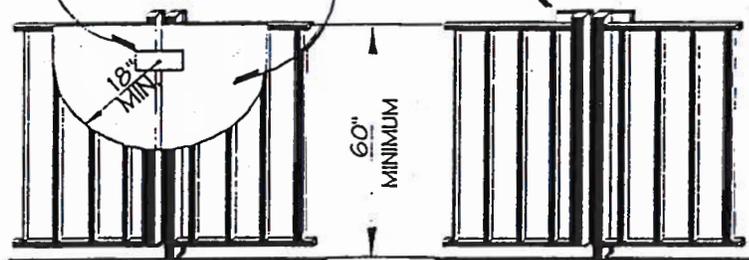


CONDITION 1:

CONDITION 2:

RELEASE MECHANISM LOCATED LESS THAN 54" ABOVE GRADE

RELEASE MECHANISM LOCATED 54" OR MORE ABOVE GRADE

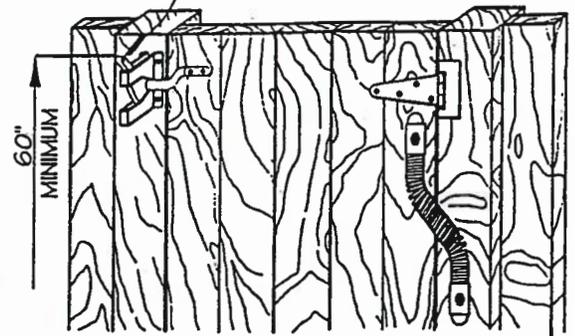

TYPICAL SELF-LATCHING GATE and SPRING CLOSER